


Product code guide (Radial lead type)

(Example : SMG series, 250V-220 μ F, ϕ 18 \times 40L, Straight lead with bulk)

Please refer to the following table

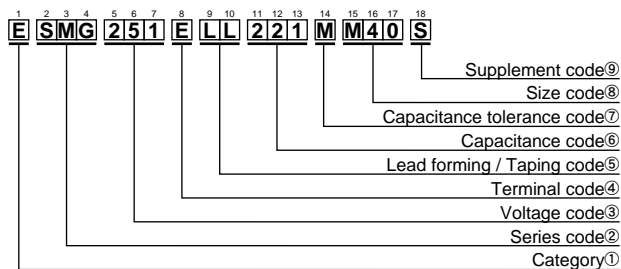

①Category

Type	Code 1th
Polar	E
Bi-polar	B

②Series code

Series name	Code		
	2th	3th	4th
SMG	S	M	G
FL	F	L	—
No series name	C	S	T

③Voltage code

Voltage (V)	Code		
	5th	6th	7th
4	4	R	0
6.3	6	R	3
10	1	0	0
16	1	6	0
25	2	5	0
35	3	5	0
50	5	0	0
63	6	3	0
80	8	0	0
100	1	0	1
160	1	6	1
200	2	0	1
250	2	5	1
315	3	B	1
350	3	5	1
400	4	0	1
420	4	2	1
450	4	5	1
500	5	0	1

④Terminal code

Type	Code 8th
Radial lead	E

⑤Lead forming / Taping code

Type	Contents	Code	
		9th	10th
Lead forming (Radial lead /Bulk)	Straight	L	L
	CC(3.5mm)	C	3
	CC(5.0mm)	C	5
	FC	F	C
	FM	F	M
	MC	M	C
	BC	B	C
Taping (Radial lead)	RC	R	C
	Straight	T	D
	Sloping clinch	T	D
	Straight (Skip a hole)	T	E
	Clinch (F=2.5mm)	T	A
	Clinch (F=3.5mm)	T	B
Clinch (F=5.0mm)	T	C	

Refer to product guide for lead forming and taping specifications.

⑥Capacitance code

Cap. (μ F)	Code		
	11th	12th	13th
0.10	R	1	0
0.22	R	2	2
0.33	R	3	3
0.47	R	4	7
0.68	R	6	8
1.0	1	R	0
2.2	2	R	2
3.3	3	R	3
4.7	4	R	7
6.8	6	R	8
10	1	0	0
22	2	2	0
33	3	3	0
47	4	7	0
68	6	8	0
100	1	0	1
220	2	2	1
330	3	3	1
470	4	7	1
680	6	8	1
1,000	1	0	2
2,200	2	2	2
3,300	3	3	2
4,700	4	7	2
6,800	6	8	2
10,000	1	0	3
22,000	2	2	3
33,000	3	3	3
47,000	4	7	3
68,000	6	8	3

⑦Capacitance tolerance

Tol. (%)	Code 14th
\pm 20	M
\pm 10	K
-10 to +30	Q
-10 to +50	T

⑧Size code

ϕ D	Code 15th	L	Code	
			16th	17th
4	D	5	0	5
5	E	7	0	7
6.3	F	9	0	9
8	H	11	1	1
10	J	11.5	B	5
12.5	K	12.0	1	2
14.5	U	12.5	C	5
16	L	13	1	3
18	M	15	1	5
20	N	16	1	6
22	P	20	2	0
25.4	Q	25	2	5
		30	3	0
		31.5	N	3
		35	3	5
		35.5	P	1
		40	4	0
		45	4	5
		50	5	0
		55	5	5
		60	6	0

⑨Supplement code

Sleeve material	Terminal plating material	Code 18th
		PET
	Sn-Bi	D
	Sn-Pb	C
Sleeveless (Coating case)	Sn-Bi	G
	Sn-Pb	F
PVC	Sn100%	B
	Sn-Bi	A
	Sn-Pb	N

* Refer to the appendix (Global code) for codes not listed here.